

SINEAX SV 824

Isolating switch amplifier

Output with relay contacts
in housing S17 for rail and wall mounting

CE₀₁₀₂  II (1) G

Application

The isolating switch amplifier **SINEAX SV 824** (Figs. 1 and 2) is available in two-channel version and is used for transferring binary signals from fail-safe circuits to non-fail-safe circuits.

The amplifier input may be either a sensor conforming to DIN EN 50 227 or a mechanical contact. Input and output signals are electrically insulated. Output signals available are relay contacts.

Yellow LED's on the front of the unit signal energised output relays. The direction of action of the output can be configured with the aid of switches which are also located on the front of the unit.

Provision is made for monitoring the input with respect to open and short-circuits. Should one of these faults occur, the output relay of the channel concerned resets and the fault is signalled by the red LED on the front of the unit. The monitoring circuit is enabled by a switch (e.g. for use with mechanical transmitter contacts).

The instrument fulfils all the important requirements and regulations concerning electromagnetic compatibility **EMC** and **Safety** (IEC 1010 resp. EN 61 010). It was developed and is manufactured and tested in strict accordance with the **quality assurance standard** ISO 9001.

Production QA is also certified according to guideline 94/9/EG.

Features / Benefits

- Two channels according to DIN EN 50 227 (substitute for DIN 19 234: 1990-06)
- Output relays
- Electrical isolation between input, output and power supply according to IEC 1010 resp. EN 61 010
- AC/DC power supply / Universal
- In type of protection "Intrinsic safety" [EEx ia] IIC / [Ex iaD] (see "Table 4: Data on explosion protection")
- Indication of the switching status by LED's
- Configurable input circuit monitor for detecting open and short-circuits



Fig. 1. SINEAX SV 824 in housing **S17** clipped onto a top-hat rail



Fig. 2. SINEAX SV 824 in housing **S17** screw hole mounting brackets pulled out.

- Switch for setting the direction of action
- Green LED signals a power supply failure
- Compact and narrow

SINEAX SV 824

Isolating switch amplifier

Technical data

Signal inputs \rightarrow (for channels I and II)

Type: Binary signals, preferably from contactless sensors acc. to DIN EN 50 227, in type of protection "Intrinsic safety" EEx ia IIC / Ex iaD

Number: 2 (S1 and S2)
signal inputs S1 and S2 have a common ground

Operating data

Open-circuit voltage: Approx. 8.5 V DC
Internal resistance: Approx. 1.1 k Ω
Short-circuit current: Approx. 8 mA
Switching level: Off I \leq 1.2 mA, On I \geq 2.1 mA
Hysteresis: 0.2 mA
Line resistance: Max. 50 Ω

Output contacts \rightarrow

Output A1 and A2: Output contacts for channels I and II galvanically isolated

Table 1: Version of the output contacts **A1** and **A2**

Symbol	Material	Contact rating
	Gold flashed silver alloy	AC: \leq 2 A / 250 V (100 VA) DC: \leq 2 A / 40 V

Relay approved UL, CSA, SEV, VDE, SEMKO, ÖVE, EI, BSI, FIMKO

Mechanical life: $> 5 \cdot 10^6$ operations
Switching delay: Approx. 50 ms
Direction of action of the output contacts **A1** and **A2**: Adjustable by switch

Maximum switching frequency

Input-relay output: \leq 10 Hz

Signal input monitoring

Behaviour: Circuit break and shorting are signalled by the red LED and the output of the corresponding channel is disabled.

Pick-up level according to DIN 19 234:
Short-circuit I $>$ approx. 6.3 mA
Open-circuit I $<$ approx. 0.15 mA

Effectiveness of input monitoring:

Enabled or disabled by switch \rightarrow .
If the amplifier is a contact instead of an active sensor and the input circuit has to be monitored, two resistors must be fitted close to the contact as shown in Fig. 3.

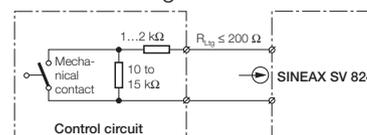


Fig. 3. Input contact circuit.

Power supply H \rightarrow

AC/DC module (DC and 45...400 Hz)

Table 2: Nominal voltages and tolerances

Nominal voltage U_N	Tolerance
24 ... 60 V DC / AC	DC $-15 \dots +33\%$ AC $\pm 15\%$
85 ... 230 V AC	$\pm 10\%$
85 ... 110 V DC	$-15 \dots +10\%$

Power input: \leq 1.4 W resp. \leq 2.7 VA

Electrical isolation:

Signal inputs to output contacts and power supply

Regulations

Electromagnetic compatibility: The standards DIN EN 50 081-2 and DIN EN 50 082-2 are observed
Intrinsically safe: Acc. to DIN EN 50 020: 1994
Electrical standards: Acc. to IEC 1010 resp. EN 61 010
Protection (acc. to IEC 529 resp. EN 60 529): Housing IP 40
Terminals IP 20
Operating voltages: $<$ 300 V between all circuits
Contamination level: 2
Overvoltage category: Output contacts and signal inputs II, power supply III
Double insulation:
– Power supply to signal inputs and output contacts
– Signal inputs to outputs
– Output contacts to each other
Test voltage:
Signal inputs to output contacts 2.3 kV, 50 Hz, 1 min.
Signal inputs to power supply 3.7 kV, 50 Hz, 1 min.
Output contacts to power supply 3.7 kV, 50 Hz, 1 min.
Output contact 1 to output contact 2 2,3 kV, 50 Hz, 1 min.

SINEAX SV 824

Isolating switch amplifier

Ambient conditions

Climatic rating:	Climate class 3Z acc. to VDI/VDE 3540
Commissioning temperature:	- 10 to +55 °C
Operating temperature:	- 20 to +55 °C
Storage temperature:	- 40 to +70 °C
Relative humidity of annual mean:	≤ 75%
Altitude:	2000 m max.
Indoor use statement!	

Installation data

Housing:	Housing S17 See Section "Dimensional drawings" for dimensions
Material of housing:	Lexan 940 (polycarbonate), flammability class V-0 acc. to UL 94, self-extinguishing, non-dripping, free of halogen

Mounting:	For snapping onto top-hat rail (35×15 mm or 35×7.5 mm) acc. to EN 50 022 or directly onto a wall or panel using the pull-out screw hole brackets
Position of use:	Any
Terminals:	DIN/VDE 0609 Screw terminals with wire guards, for light PVC wiring and max. 2 × 0.75 mm ² or 1 × 2.5 mm ²
Vibration:	2 g acc. to EN 60 068-2-6
Shock:	3 × 50 g 3 shocks each in 6 directions acc. to EN 60 068-2-27
Weight:	Approx. 185 g

Standard version

When ordering, it is only necessary to quote the **Order No.:**

Table 3: Instruments in [Ex ia] IIC / [Ex iaD] version, (signal inputs intrinsically safe)

Description	Power supply (nominal voltage U_N)	Order No.
Two-channel isolating switch amplifier	24 ... 60 V DC/AC	133 992
Signal inputs in type of protection "Intrinsic safety" EEx ia IIC/Ex iaD*	85 ... 110 V DC 85 ... 230 V AC	134 007

* Max. values see "Table 4: Data on explosion protection".

Basic configuration: Switch 1 in position "ON"
Switch 2 in position "ON"
Switch 3 in position "ON"


Table 4: Data on explosion protection  **II (1) G**

Type	Type of protection	Signal input	Type examination certificate	Mounting location of the instrument									
824 - 133 824 - 134	[EEx ia] IIC [Ex iaD]	$U_o = 12\text{ V}$ $I_o = 13\text{ mA}$ $P_o = 39\text{ mW}$ linear characteristic <table border="1"> <tr> <td></td> <td>IIC</td> <td>IIB</td> </tr> <tr> <td>L_o</td> <td>200 mH</td> <td>730 mH</td> </tr> <tr> <td>C_o</td> <td>1.41 μF</td> <td>9 μF</td> </tr> </table>		IIC	IIB	L_o	200 mH	730 mH	C_o	1.41 μF	9 μF	ZELM 06 ATEX 0322	Outside the hazardous area
	IIC	IIB											
L_o	200 mH	730 mH											
C_o	1.41 μF	9 μF											

SINEAX SV 824

Isolating switch amplifier

Electrical connections

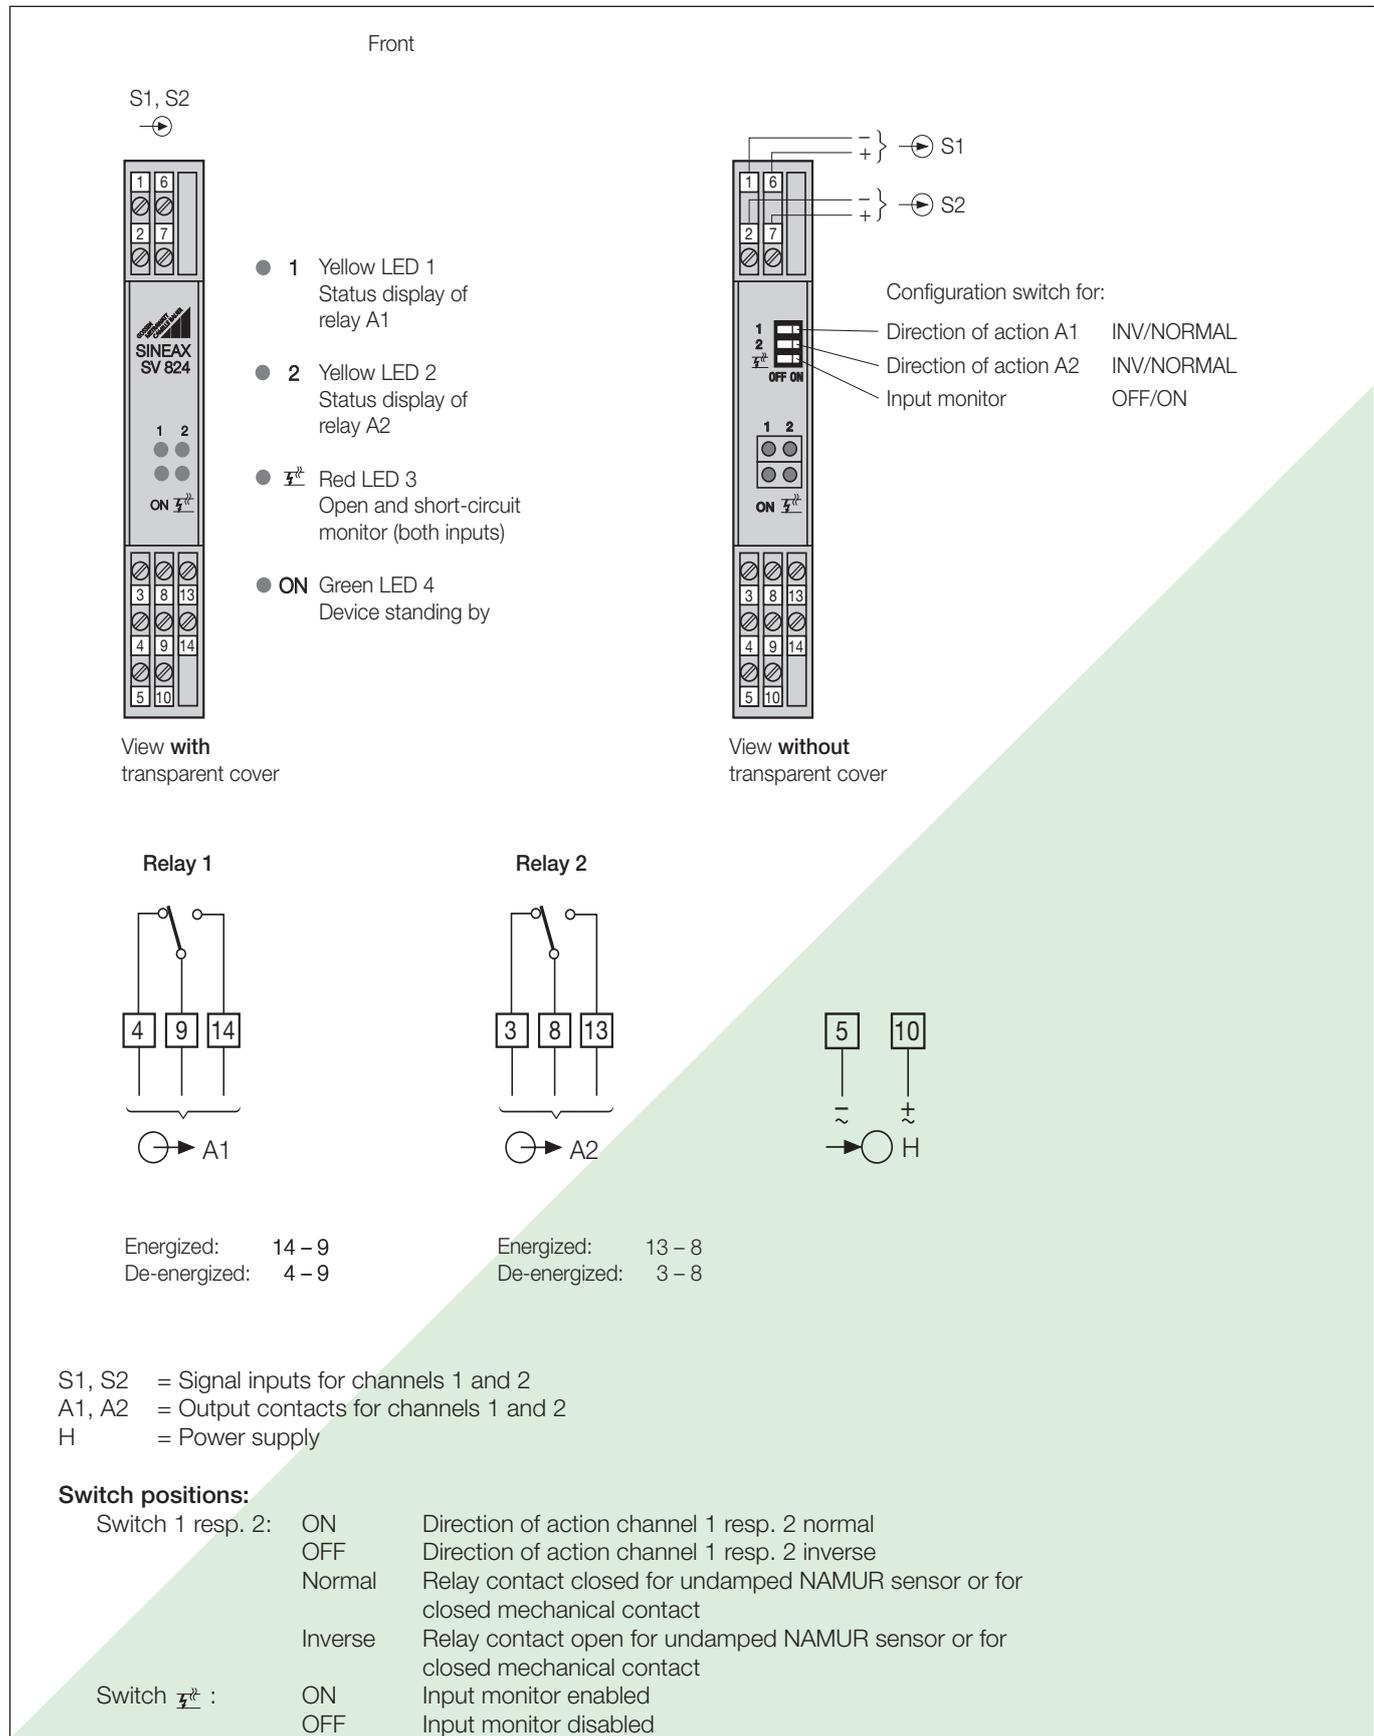

SINEAX SV 824


Isolating switch amplifier

Operating sense

The statuses of outputs A1 and A2 and the LED's 1, 2 and $\overline{1}$ for the different operating senses and input signals are given in Table 5.

Explanation to the statuses of the signal inputs, contact outputs and LED displays

Signal inputs S1 and S2

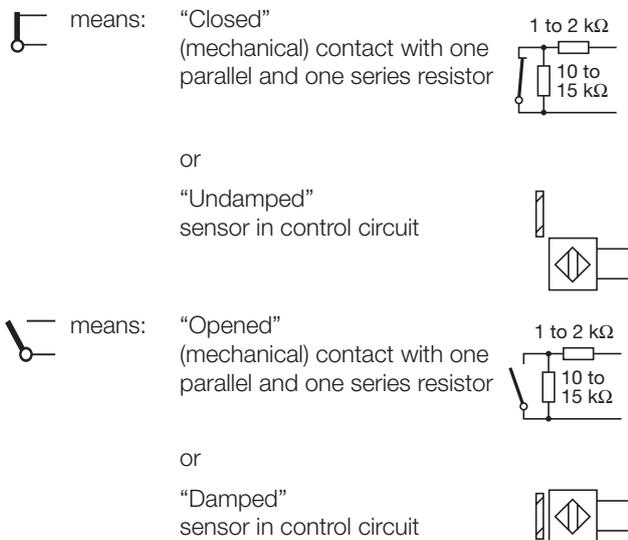


LED displays LED 1, LED 2 and LED $\overline{1}$

- ⊗ means: "OFF" ($\hat{=}$ status with power failure too)
- means: "ON"

Table 5: Function behaviour to connection of **sensors according to DIN 19 234 or mechanical contacts with one parallel and one series resistor**

Control circuit	Signal inputs S1 and S2	LED display (red) Status	Output contacts A1 and A2 Status	LED displays (yellow) LED 1 and LED 2 Status	Configuration switches	
					$\overline{1}$ Position *	«1» and «2» Position
Normal operation		●		●	<input type="checkbox"/>	<input type="checkbox"/>
		⊗		⊗	<input type="checkbox"/>	<input type="checkbox"/>
		●		●	<input type="checkbox"/>	<input type="checkbox"/>
		●		●	<input type="checkbox"/>	<input type="checkbox"/>
Open-circuit / short-circuit	(1)	●		⊗	<input type="checkbox"/>	(1)

Output contacts A1 and A2

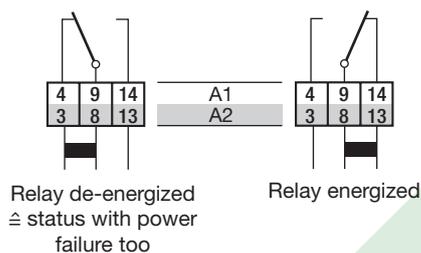

(1) No influence

* Where mechanical contacts are used **without a parallel and series resistor**, the switch " $\overline{1}$ " for monitoring the input must be switched to "OFF" (to the left). The settings for the logic are the same as for "normal operation".

If only one channel of a dual-channel version is being used, a resistor (1 ... 15 k Ω) must be connected across the input which is not in use. This excludes any spurious operation in the red alarm LED.

SINEAX SV 824

Isolating switch amplifier

Dimensional drawings

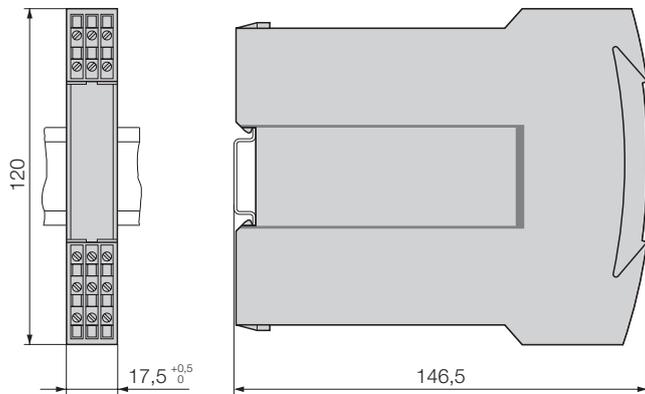


Fig. 4. SINEAX SV 824 in housing S17 clipped onto a top-hat rail (35x15 mm or 35x7.5 mm, acc. to EN 50 022)

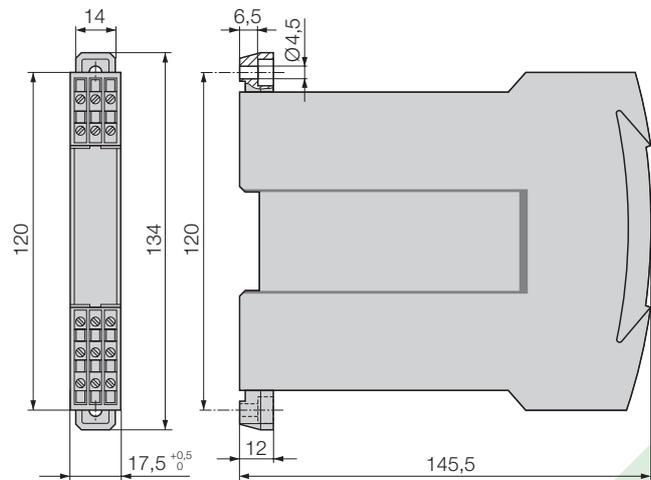


Fig. 5. SINEAX SV 824 in housing S17 screw hole mounting brackets pulled out.

Standard accessories

- 1 Operating Instructions in three languages: German, French, English
- 2 Labels (under transparent cover)
- 1 Type Examination Certificate

 **CAMILLE BAUER**

Rely on us.

Camille Bauer AG
Aargauerstrasse 7
CH-5610 Wohlen / Switzerland

Phone: +41 56 618 21 11

Fax: +41 56 618 35 35

e-Mail: info@camillebauer.com

www.camillebauer.com